


# MITX-6922

## Intel QM67/QM77 Based Mini ITX Motherboard

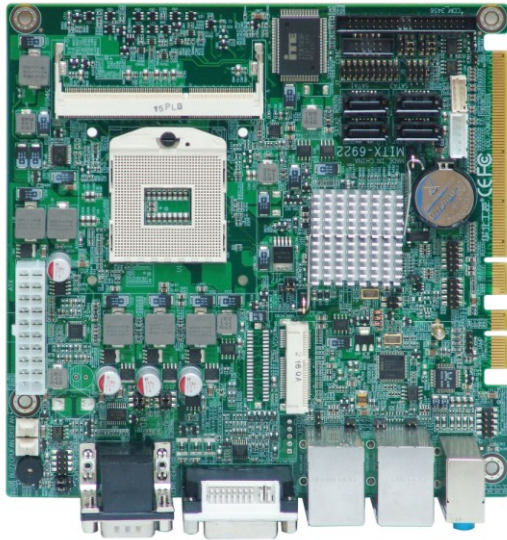

### Features :

- ◆ Intel QM67/QM77 chipset based , support Intel 2<sup>nd</sup> & 3<sup>rd</sup> GEN i7/i5/i3 Processor, Intel AMT option
- ◆ 2x DDR3 1066/1333/1600MHz SO-DIMM, up to 8GB
- ◆ Provide 4x SATAII, SATA1/2(SATA3.0); SATA3/4(SATA2.0), hot-swap, RAID 0/1/5
- ◆ VGA,DVI-D,HDMI,LVDS video out, dual independent display supported
- ◆ 6x serial ports, 8x USB2.0, 7.1CH HD audio, 2x Gigabit LAN
- ◆ 1xPCIe x4 , x16 connecting finger, 2x Mini PCIe ,onboard SIM slot for 3G module



### Specification :

- ◆ **CPU**  
Support Intel 2nd and 3rd GEN Socket G2 Sandy Bridge/Ivy Bridge Core i7/i5/i3 CPU.
- ◆ **Chipset**  
Intel QM67/QM77
- ◆ **Memory**  
2x dual channel DDR3 1066/1333/1600MHz SO-DIMM slots, up to 8GB
- ◆ **BIOS**  
AMI EFI BIOS
- ◆ **Super I/O**  
ITE IT8783F
- ◆ **Ethernet**  
Intel 82579+Intel 82574L, 10/100/1000Mbps,2x LAN, Intel AMT
- ◆ **Graphic Controller**  
Intel Core™i7/i5/i3 integrated, support DX10.1/ OGL 3.0  
DXVA supports video acceleration and HD decoding (VC1 / HW / AVC/ MPEG2 )
- ◆ **Display**  
1x VGA,1x DVI-D,1x HDMI,1x 24bit LVDS  
VGA up to 2048x1536  
DVI-D up to 1920x1200  
HDMI up to 1920x1200  
Dual channel 24bit LVDS up to 1920x1200
- ◆ **Audio**  
Realtek ALC888,HD Audio , Line-out, Line-in, MIC-in, Amplifier(12w)
- ◆ **I/O**  
4x SATAII; SATA1/2(SATA3.0); SATA3/4(SATA2.0),hot-swap, supporting RAID 0/1/5  
1x keyboard interface,1x mouse interface  
8x USB2.0 (incl. 4x USB 2.0 on the front panel)  
5x RS-232, 1x RS-232/422/485
- ◆ **Expansion**  
2x Mini PCIe for 3G and SSD
- ◆ **Watchdog**  
255 Level, generate system reset when the timer overflows
- ◆ **GPIO**  
16bit GPIO
- ◆ **FAN**  
1x 3Pin CPU\_FAN,1x SYS\_FAN
- ◆ **Power Supply**  
Standard ATX 20Pin
- ◆ **Temperature**  
Operating: 0°C ~ 60°C  
Storage: -40°C ~ 80°C
- ◆ **Humidity**  
5% ~ 95%, relative humidity, no-condensing
- ◆ **Dimension**  
170mm x170mm

### Dimension :

